Regions of Possible Motion in Mechanical Systems[1]

M. P. Kharlamov[2]

Presented by Academician P.Ya.Kochina March 5, 1982
Received April 4, 1982

http://adsabs.harvard.edu/abs/1982SPhD...27..921K

arXiv:1401.6280v1 [math-ph] 24 Jan 2014

We consider a dynamical system

$$\dot{x} = X(x), \qquad x \in M \tag{1}$$

having first integrals

$$K_1, K_2, \ldots, K_n : M \to \mathbf{R}. \tag{2}$$

In connection with the analysis of the trajectories of system (1), S. Smale [1] formulates the problem of investigation of the topological types of integral manifolds

$$J_k = \{x \in M : K_i(x) = k_i, i = 1, 2, \ldots, n\}. \tag{3}$$

Here $k = (k_1, k_2, \ldots, k_n) \in \mathbf{R}$ stands for the set of arbitrary integral constants. This problem can be solved by classifying the projections of J_k to some manifold N such that $\dim N < \dim M$. In mechanics, this manifold arises in natural way. It is the space of variables depending only on the object configuration. The investigation of the projections of phase trajectories to the space of configuration variables is also of special interest because these projections are straightforwardly connected with the motion of the real mechanical system.

Let M be the total space of a locally trivial vector bundle $\pi : M \to N$ with a fiber F. For $z \in N$, we denote $F_z = F^{-1}(z)$.

Definition. *The set $u_k = \pi(J_k)$ is called the* **region of possible motion** *(RPM) on N. Any vector $w \in F_z \cap J_k$ is called an* **admissible velocity** *at the point $z \in u_k$.*

Denote

$$\pi_k = \pi|_{J_k} : J_k \to N. \tag{4}$$

Two regions of possible motion $u_k, u_{k'}$ $(k, k' \in \mathbf{R}^n)$ are considered equivalent if there exists a diffeomorphism $\Gamma : J_k \to J_{k'}$ such that $\pi_{k'} \circ \Gamma = \pi_k$.

Definition. *For a given RPM u_k the visible contour ∂_k of the manifold J_k under the projection π_k is called the* **generalized boundary** *of u_k.*

In other words, the visible contour [2,3] can be defined as the set ∂_k of those points of N over which the map (4) is not locally trivial. Obviously, if u_k and $u_{k'}$ are equivalent, then there exists a diffeomorphism $\gamma : u_k \to u_{k'}$ such that $\gamma(\partial_k) = \partial_{k'}$.

If $\dim J_k \geqslant \dim N$, then ∂_k divides N into open connected components, inside which the structure of the sets of the admissible velocities does not change. Pointing out these sets at some point of each component and at the points of ∂_k, we present the integral manifold J_k in the form of some bundle over u_k.

[1] Printed in USA. Soviet Physics Doklady, 1982, vol. 27, pp. 921–923.
Translated from Kharlamov M.P. "K issledovaniju oblastej vozmozhnosti dvizhenija v mehanicheskikh sistemakh", Doklady AN SSSR, 1982, **267**, 3, pp. 571–573.

[2]Donetsk State University (1982).

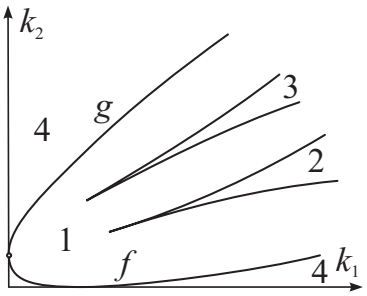

Figure 1

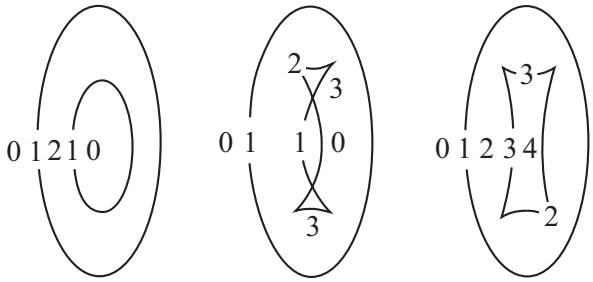

Figure 2

Let $x \in M, z = \pi(x)$. We denote by $V(x) : F \to \mathbf{R}^n$ the restriction to the subspace $T_xF_z \subset T_xM$ ($T_xF_z \cong F$) of the operator $T_x(K_1 \times K_2 \times \ldots \times K_n) : T_xM \to T_k\mathbf{R}^n \cong \mathbf{R}^n$.

Theorem. *The image of a point $x \in J_k$ belongs to the generalized boundary of the corresponding RPM if and only if*

$$\operatorname{rank} V(x) < n. \tag{5}$$

In particular, the generalized boundary always contains the image of those points of J_k, at which the integrals (2) are dependent.

The suggested method of reconstructing the integral manifolds makes it possible to describe the surfaces (3) also in those cases when they are not smooth [4,5]. This is important, first, because there are no general theorems on the structure of critical levels of smooth mappings, and, second, because the special classes of motions always belong to the critical integral surfaces (3).

E x a m p l e. Consider the problem of the motion of a gyrostat without external forces. In the moving frame, this problem is described by the equations

$$A\dot{\omega} + \omega \times (A\omega + \lambda) = 0, \qquad \dot{\nu} = \nu \times \omega. \tag{6}$$

Usually, the following relation is accepted

$$\nu \cdot \nu = 1. \tag{7}$$

It defines the so-called Poisson sphere. The phase space of system (6) then is $M = S^2 \times \mathbf{R}^3$. The system on M has three first integrals [6]

$$K_1 = (A\omega + \lambda) \cdot (A\omega + \lambda), \quad K_2 = A\omega \cdot \omega, \quad K_3 = (A\omega + \lambda) \cdot \nu.$$

Their common levels J_k ($k \in \mathbf{R}^3$) generally are two-dimensional surfaces.

Let us suppose that the gyrostatic moment λ does not belong to any of the the principal planes of the tensor A. The set Σ of the points $k \in \mathbf{R}^3$ corresponding to the changes in the structure of J_k can be described as follows. On the plane (k_1, k_2), we introduce the curve (see Fig. 1)

$$\begin{cases} k_1 = \dfrac{a_1^2\lambda_1^2}{(\sigma - a_1)^2} + \dfrac{a_2^2\lambda_2^2}{(\sigma - a_2)^2} + \dfrac{a_3^2\lambda_3^2}{(\sigma - a_3)^2}, & -\infty \leqslant \sigma \leqslant \infty, \\ k_2 = \sigma^2 \left[\dfrac{a_1\lambda_1^2}{(\sigma - a_1)^2} + \dfrac{a_2\lambda_2^2}{(\sigma - a_2)^2} + \dfrac{a_3\lambda_3^2}{(\sigma - a_3)^2} \right], & \sigma \neq a_1, a_2, a_3. \end{cases} \tag{8}$$

Here $a_1, a_2 < a_3$ are the diagonal elements of the tensor A^{-1} in the principle axes. Denote by $k_2 = f(k_1)$ and $k_2 = f(k_1)$ the one-valued branches of the curve (8) corresponding to

the segments $-\infty \leqslant \sigma < a_1$ and $a_3 < \sigma \leqslant \infty$ respectively. Let C_1 be the cylinder in $\mathbf{R}^3$ with the directrix (8) and generators parallel to Ok_3. Denote by C_2 the parabolic cylinder $k_1 = k_3^2$. Then

$$\Sigma = \{k \in C_1 : k_1 \geqslant k_3^2\} \cup \{k \in C_2 : f(k_1) \leqslant k_2 \leqslant g(k_1)\}.$$

This set divides $\mathbf{R}^3$ into four regions 1–4; in each region the type of the manifold J_k is constant. Obviously, $J_k = \varnothing$ in region 4.

Let us take the sphere (7) for the manifold N. The condition (5) takes the form

$$[\omega \times (A\omega + \lambda)] \cdot \nu = 0. \tag{9}$$

Together with the equations

$$K_1(\omega) = k_1, \quad K_2(\omega) = k_2, \quad K_3(\omega, \nu) = k_3 \tag{10}$$

equality (9) defines a curve in M; the image of this curve on the sphere (7) is the generalized boundary of RPM:

$$\nu = [k_3 \pm (k_2 + \omega \cdot \lambda)Q(\omega)] \frac{(A\omega + \lambda)}{k_1} \pm Q(\omega)\omega. \tag{11}$$

Here

$$Q(\omega) = \sqrt{\frac{k_1 - k_3^2}{k_1\omega^2 - (k_2 + \omega \cdot \lambda)^2}}\,.$$

From the first two equations (10) we can express the projections of the angular velocity in one auxiliary variable τ (see [7]) as $\omega_i = \omega_i(\tau; k_1, k_2)$ $(i = 1, 2, 3)$. Substituting these values in the right-hand part of (11) we obtain the explicit parametric equations of the generalized boundary. Investigating these equations, we come to the main types of the connected components of an RPM shown in Fig. 2. The numbers on the figure show the number of the admissible velocities. Obviously, we have the images of the two-dimensional torus T^2. All of these images are found in any of the regions 1–3 in $\mathbf{R}^3 \backslash \Sigma$. In region 1 the RPM consists of one component of the shown type, in regions 2,3 we have two such components. Thus, $J_k = T^2$ in region 1 and $J_k = 2T^2$ in regions 2 and 3. The trajectories on the tori are quasi-periodic [2], therefore the character of the motions on the Poisson sphere is also clear. At the points of Σ the integral surfaces have one of the following types: the circle, the direct product of the eight-type curve with the circle or with the circle having an angular point, the disjoint union of the circle and the two-dimensional torus bearing quasi-periodic motions.

References

[1] S. Smale, Topology and mechanics, *Inventiones Math.* **10**, 4 (1970), pp. 305–331.

[2] V.I. Arnold, Mathematical Methods of Classical Mechanics (Springer, 1989).

[3] F. Pham, Introduction a l'Étude Topologique des Singularités de Landau (Paris, Gauthier-Villars Éditeur, 1967).

[4] M.P. Kharlamov, Phase topology of one integrable case of the rigid body motion, *Mekh. Tverd. Tela*, No. 11 (1979), pp. 50–64. (In Russian)

[5] M.P. Kharlamov, Phase topology of one problem of motion of a gyroscope, *Mekh. Tverd. Tela*, No. 13 (1981), pp. 14–23. (In Russian)

[6] N.E. Zhukovsky, On the motion of a rigid body with holes filled with a homogeneous fluid, in *Collected Works*, vol. 1 (1949), pp. 31–152. (In Russian)

[7] J. Wittenburg, Dynamics of Systems of Rigid Bodies (B.G. Teubner Stuttgart, 1977).

Translated by M.P.Kh.

Address: *Russia, 400131, Volgograd, Gagarin Street, 8, Volgofrad Branch of RANEPA*
E-mail: *mharlamov@vags.ru*